

NYLON ROD GUIDES

Reduce rod wear, tubing wear, and lifting costs with Texas Products WSD Nylon Rod Guides. They reduce rod wear and tubing wear by acting as wear resistant bushings that space the rod couplings away from the tubing bore. They reduce lifting costs by helping the rods fall straight, without buckling, for a longer pumping stroke.

In the field, installing our Nylon Guides on the rod is easy. Their diagonal slots slip over the rod, then snap into place using a 24" (IN.) pipe wrench. The open jaws of the pipe wrench will span opposite ends of a guide and leverage on the wrench handle will snap the Guide on to the rod.


Texas Products WSD Rod Guides have more wear surface and last longer than most competitors in the industry. Our quality assurance program ensures reliability and integrity on all of our Rod Guides.

PART NUMBERS & INFORMATION

NYLON ROD GUIDES			
PART NUMBER	TUBING SIZE (IN.)	SUCKER ROD (IN.)	GUIDE O.D. (IN.)
TP20058	2 3/8	5/8	1.850
TP20034	2 3/8	3/4	
TP20078	2 3/8	7/8	
TP25058	2 7/8	5/8	2.200
TP25034	2 7/8	3/4	
TP25078	2 7/8	7/8	
TP25010	2 7/8	1	
TP35034	3 1/2	3/4	2.750
TP35078	3 1/2	7/8	
TP35010	3 1/2	1	

SPECIAL NOTE:

In cold weather our nylon guides can be warmed in boiling water to make them more pliable. When installing guides in older wells, it is suggested to insert a pony rod below the lowest guide to raise all couplings and guides above any worn spots in the tubing.

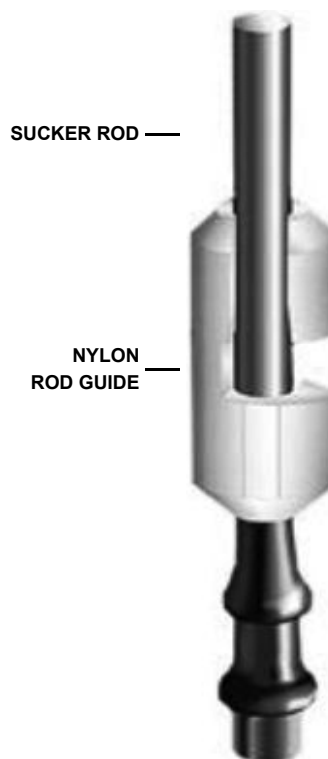

RUBBER ROD GUIDES

Molded from hi-temp abrasion resistant, synthetic rubber Texas Products WSD Rubber Rod Guides are slotted, hammer-on, spring-backed guides. They can be used on wells with elevated temperatures (up to 300° F), providing a positive hold on the sucker rod while preventing any slippage. Below is a list of the most common sizes only, for more sizing please contact one of Texas Products WSD sales representatives.

PART NUMBERS & INFORMATION

RUBBER ROD GUIDES			
PART NUMBER	TUBING SIZE (IN.)	SUCKER ROD (IN.)	GUIDE O.D. (IN.)
TP20058R	2 3/8	5/8	1.750
TP20034R	2 3/8	3/4	
TP20078R	2 3/8	7/8	
TP25034R	2 7/8	3/4	2.125
TP25078R	2 7/8	7/8	
TP25010R	2 7/8	1	

* For more sizes please contact Texas Products WSD.



RUBBER GUIDE